




Type 2 Surge Protection Kit

- Designed and tested for use with Lewden branded distribution boards.
- Suitable for use in TN-C-S (PME) / TN-S / TT network systems.
- The [surge protection device](#) is earth leakage free and may be connected before or after RCCB/RCBO circuit protection.
- 5-year warranty.
- Integral coloured flag indicating [SPD](#) health status.
- Supplied with 40A MCB & cables.

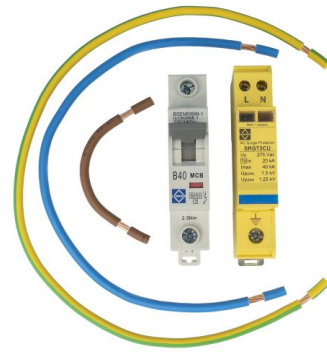

SRG1VCU-KIT

TECHNICAL DATA		REGISTRY	
Surge protective class	Type 2	Net weight	0.30KG
Frequency	50-60Hz	Min order quantity	1
Earthing Systems	TT	EAN Code	5026992043141
Earthing Systems	TN-C-S-(PME)	Gross Weight	0.32KG
Earthing Systems	TN-S		
Recommender backup MCB	40A/50A B/C 6kA MCB	REFERENCE STANDARDS	STANDARDS
Nm dischar. current(In)(8/20uS	20kA (L/N,L/PE)	IEC 61643-11:2011	
Nm dischar. current(In)(8/20uS	40kA (N/PE)	EN 61643-11:2012	
Maximum discharge current	50kA (L/N)		
Phase	1		
Modules Number	2		
Signalling contact	NO		
Execution	DIN RAIL MOUNTING		